## Uniform Mitigation Verification Inspection Form only of this form and any documentation provided with the insu

Maintain a copy of this form and any documentation provided with the insurance policy  Inspection Date:							
Owner Information Owner Name:	Owner Information  Courtest Person						
Address:				Contact Person: Home Phone:			
City:	Zip:		Work Phone:				
County:	Zip.		Cell Phone:				
Insurance Company:			Policy #:				
Year of Home:	# of Stories:		Email:				
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.							
1. <b>Building Code</b> : Was the structure the HVHZ (Miami-Dade or Browar	d counties), South Flor	ida Building Code (SFBC	C-94)?				
☐ A. Built in compliance with the a date after 3/1/2002: Building	Permit Application Dat	te (MM/DD/YYYY)//	<u> </u>				
☐ B. For the HVHZ Only: Built in provide a permit application wi	th a date after 9/1/1994	: Building Permit Applic					
☐ C. Unknown or does not meet t	he requirements of Ans	swer "A" or "B"					
<ol> <li>Roof Covering: Select all roof covering identified.</li> </ol>				ance for each roof			
2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance			
☐ 1. Asphalt/Fiberglass Shingle	/						
☐ 2. Concrete/Clay Tile							
3. Metal							
4. Built Up	/						
5. Membrane	/						
6. Other	/						
A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.							
☐ B. All roof coverings have a M roofing permit application after							
$\Box$ C. One or more roof coverings	-		"B".				
☐ D. No roof coverings meet the	requirements of Answe	r "A" or "B".					
3. <b>Roof Deck Attachment</b> : What is the	ne weakest form of root	f deck attachment?					
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.							
24"inches o.c.) by 8d common other deck fastening system or	B. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.						
24"inches o.c.) by 8d common decking with a minimum of 2 r	C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent						
Inspectors Initials Property Address							

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

	or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at leas 182 psf.				
	П		ed Concrete Roof Deck.		
	П				
	П		or unidentified.		
		G. No attic a			
1					
4. <b>Roof to Wall Attachment:</b> What is the <b>WEAKEST</b> roof to wall connection? (Do not include attachment of hip/5 feet of the inside or outside corner of the roof in determination of WEAKEST type)					
	Ш	A. Toe Nails			
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or		
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D		
	Miı	nimal conditi	ons to qualify for categories B, C, or D. All visible metal connectors are:		
			Secured to truss/rafter with a minimum of three (3) nails, and		
			Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, <b>and</b> free of visible severe corrosion.		
		B. Clips			
			Metal connectors that do not wrap over the top of the truss/rafter, or		
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.		
		C. Single W			
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.		
		D. Double V	Vraps		
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, <b>or</b>		
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.		
		E. Structural	Anchor bolts structurally connected or reinforced concrete roof.		
		F. Other:			
		G. Unknown	or unidentified		
		H. No attic a	access		
5.			What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).		
		A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.		
		B. Flat Roof	Total length of non-hip features: feet; Total roof system perimeter: feet		
			less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof areasq ft		
		C. Other Ro	of Any roof that does not qualify as either (A) or (B) above.		
6.	Sec	A. SWR (also sheathing	er Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) so called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the gor foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss.		
		B. No SWR			
		C. Unknown	n or undetermined.		
In	spec	tors Initials _	Property Address		
*Т	hia .	va <b>vif</b> ication f	own is valid for up to five (5) years provided no metarial changes have been made to the structure or		

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the <u>weakest</u> form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

	Opening Protection Level Chart		Glazed Openings			Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure						
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
I N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection						

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

• For Garage Doors Only: ANSI/DASMA 115

△ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
• For Skylights Only: ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
<u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

the table above

Inspectors Initials \_\_\_\_\_ Property Address\_

N. Exterior Opening Protection (unverified shutter systems with no documentation) All Glazed openings are protected with protective coverings not meeting the requirements of Answer "A", "B", or C" or systems that appear to meet Answer "A" or "B" with no documentation of compliance (Level N in the table above).					
N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist					
N.2 One or More Non-Glazed openings classified as Level D in the table above, and no N table above	5 5 4 5 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7				
N.3 One or More Non-Glazed openings is classified as Level X in the table above					
X. None or Some Glazed Openings One or more Glazed openings classified and I	Level X in the table above.				
MITIGATION INSPECTIONS MUST BE CERTIFIED BY A QUAL Section 627.711(2), Florida Statutes, provides a listing of individuals	who may sign this form.				
Qualified Inspector Name: License Type: TROY SUMNER CERT. GENERAL CONTR	License or Certificate #: CACTOR CGC 004629				
Inspection Company: BUILT RIGHT CONSULTANTS, INC.	Phone: 727-345-8400				
Qualified Inspector – I hold an active license as a: (check one)	121-040-0400				
training approved by the Construction Industry Licensing Board and completion of a proficience					
☐ Building code inspector certified under Section 468.607, Florida Statutes.  ☑ General, building or residential contractor licensed under Section 489.111, Florida Statutes.					
<ul> <li>✓ General, building or residential contractor licensed under Section 489.111, Florida Statutes.</li> <li>□ Professional engineer licensed under Section 471.015, Florida Statutes.</li> </ul>					
Professional architect licensed under Section 471.013, Florida Statutes.					
Any other individual or entity recognized by the insurer as possessing the necessary qualification	ons to properly complete a uniform mitigation				
verification form pursuant to Section 627.711(2), Florida Statutes.	one of property complete a uniform imagazon				
Individuals other than licensed contractors licensed under Section 489.111. Florida Statutes, or professional engineer licensed under Section 471.015. Florida Statutes, must inspect the structures personally and not through employees or other persons.  Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection.  I,					
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)					
The definitions on this form are for inspection purposes only and cannot be used to c as offering protection from hurricanes.					
Inspectors Initials HH Property Address 141 BELLA VISTA TERRACE, VENIC	CE, FL 34275				
*This verification form is valid for up to five (5) years provided no material changes inaccuracies found on the form.	have been made to the structure or				
OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155	Page 4 of 4				

























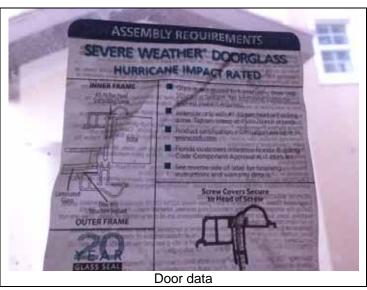



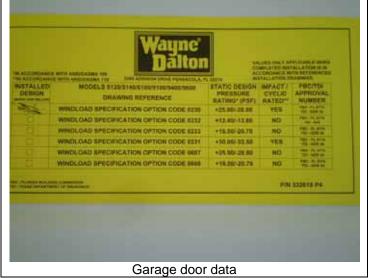

Structure Detail					
Parcel ID:	0373-000-1100	Address:	141 BELLA VISTA TE BLDG		
Application Date:	09/12/13	Owner:	WCI COMMUNITIES INC		
Application #:	13 - 2978	Application Type:	MULTI FAMILY THREE AND FOUR FAMILY		
Valuation:	\$934,923	Square Footage:	0		
Application Status:	ISSUED	General Contractor:	WCI COMMUNITIES INC		
Zoning Description:	PLANNED UNIT DEVELOPMENT				
Str# / Seq#: 000 / 000					
Structure Description: NEW MULTI					

Permit info